

› INCORPORATING RODA

CB-FEED

Automatic Sheets Feeder



CB-FEED allows optimum performances and set free the operator. Equipped with a stack elevator and vacuum head, the top sheet is automatically transported via a set of transfer rolls to the pre-feed position, on the following machine's infeed table.


A timed pusher and squaring device, then automatically introduces the sheet into the machine at need. An innovative double feed feature allows two sheets to be introduced simultaneously, providing the option for double productivity on suitable jobs.

Designed for a fast and precise inserting of corrugated board, the machine can also be used with some special attachments — to be required at order — for solid fiber board, presspan, acetate, foam and plastic materials.



SOLEMA

CB-FEED (A → left hand)

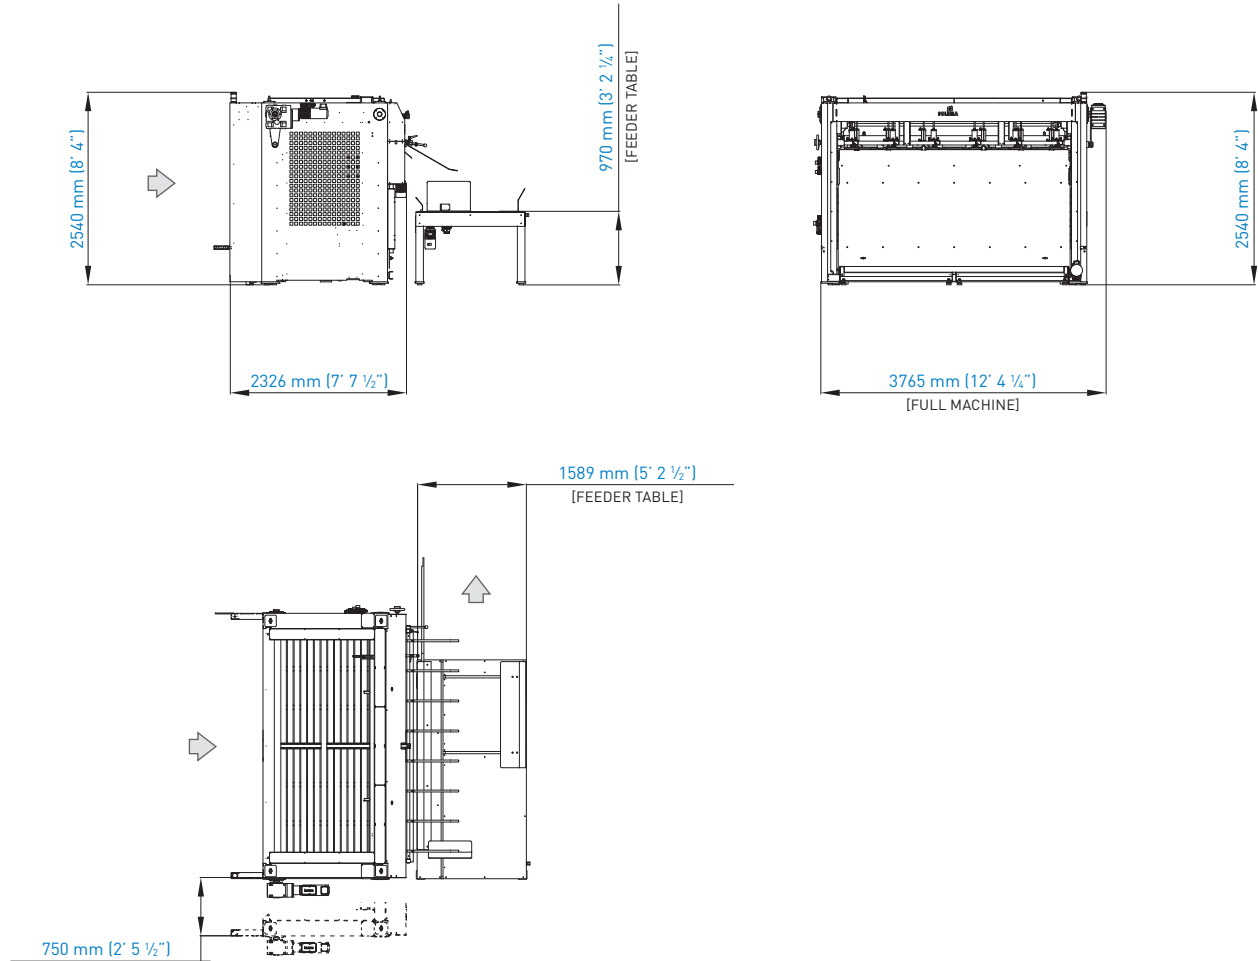

■ total weight with optional units approx. 1300 kg (2860 lb)

TECHNICAL DETAILS

SHEETS LENGHT

- max. 2600 mm (102 ²³/₆₄"

SHEETS WIDTH

- max. 1400 mm (55 ¹/₈"

PILE HEIGHT

- max. 1400 mm (55 ¹/₈"

PILE WEIGHT

- max. 900 kg (1984 lb)

CORRUGATED BOARD THICKNESS

- max. 10 mm (25 ⁵/₆₄"

ELECTRICAL REQUIREMENTS

- electrical power supply: 3 × 400 V PE 50 Hz
- controls voltage: 24 V DC

PNEUMATIC SYSTEM

- pressure: 6 bar

OPTIONAL DEVICES AVAILABLE

- Pile's jogger
- Additional infeed roller conveyor

MACHINE CONFIGURATION

- A →
- B ←

APPLIES TO

- GANDRIA
- IDEALGANDRIA
- SOL-COMBI F.L.
- SOL-COMBI
- SUPER-COMBI

FOR NORTH AMERICA

SOLEMA

Via Carducci, 18 — 24066 Pedrengo — Bergamo • Italy
Tel. +39 035 654111 • Fax +39 035 654112
e-mail: info@solema-boards.com • web: www.solema-boards.com

Solema USA inc

315 Glenn Street - P.O. Box 472
Crawfordsville - IN - 47933
USA

info@solemausa.com
tel. 765 361 0806 / fax 765 361 0989